



REQUEST FOR PROPOSAL

Project Title: Cooley Laboratory Renovation
Location: Montana State University

PPA No.: 10-0023
RFP No.: 16
Date: 12/06/11

To: Dick Anderson Construction
4498 Jackrabbit Lane
Bozeman, MT 59718

Attention: Platisha

From: Cecilia Vaniman, Project Manager
Cooley Lab Renovation
Montana State University

Attention:

In order to expedite the Work and avoid or minimize delays in the Work the following proposal is requested. Please return a response by: 12/24/11 Date Sent: 12/16/11 Date Received:

RFP for Drop Inlet @ Lewis Hall West Retention Area Drain


Sketch A - B

Existing Area Drain @ Lewis Hall Will need to be plugged (Non- Shrink Grout). New 18" x 18" X 18" Concrete drop inlet with a 11" x 11" steel grate to be installed. Provide 6" SDR 35 from Drop Inlet sloped 1/4" per foot at approximately 18" below existing sidewalk elevation until pipe is exposed or a Minimum of 2 feet past the west edge of the sidewalk.

Attachment: None

This RFP is for pricing purposes only. The contractor shall not proceed with the scope of work described within until pricing is approved by the owner in writing.

Distribution: [] Owner [] Agency [x] Architect [x] Contractor [] Engineer [] Other

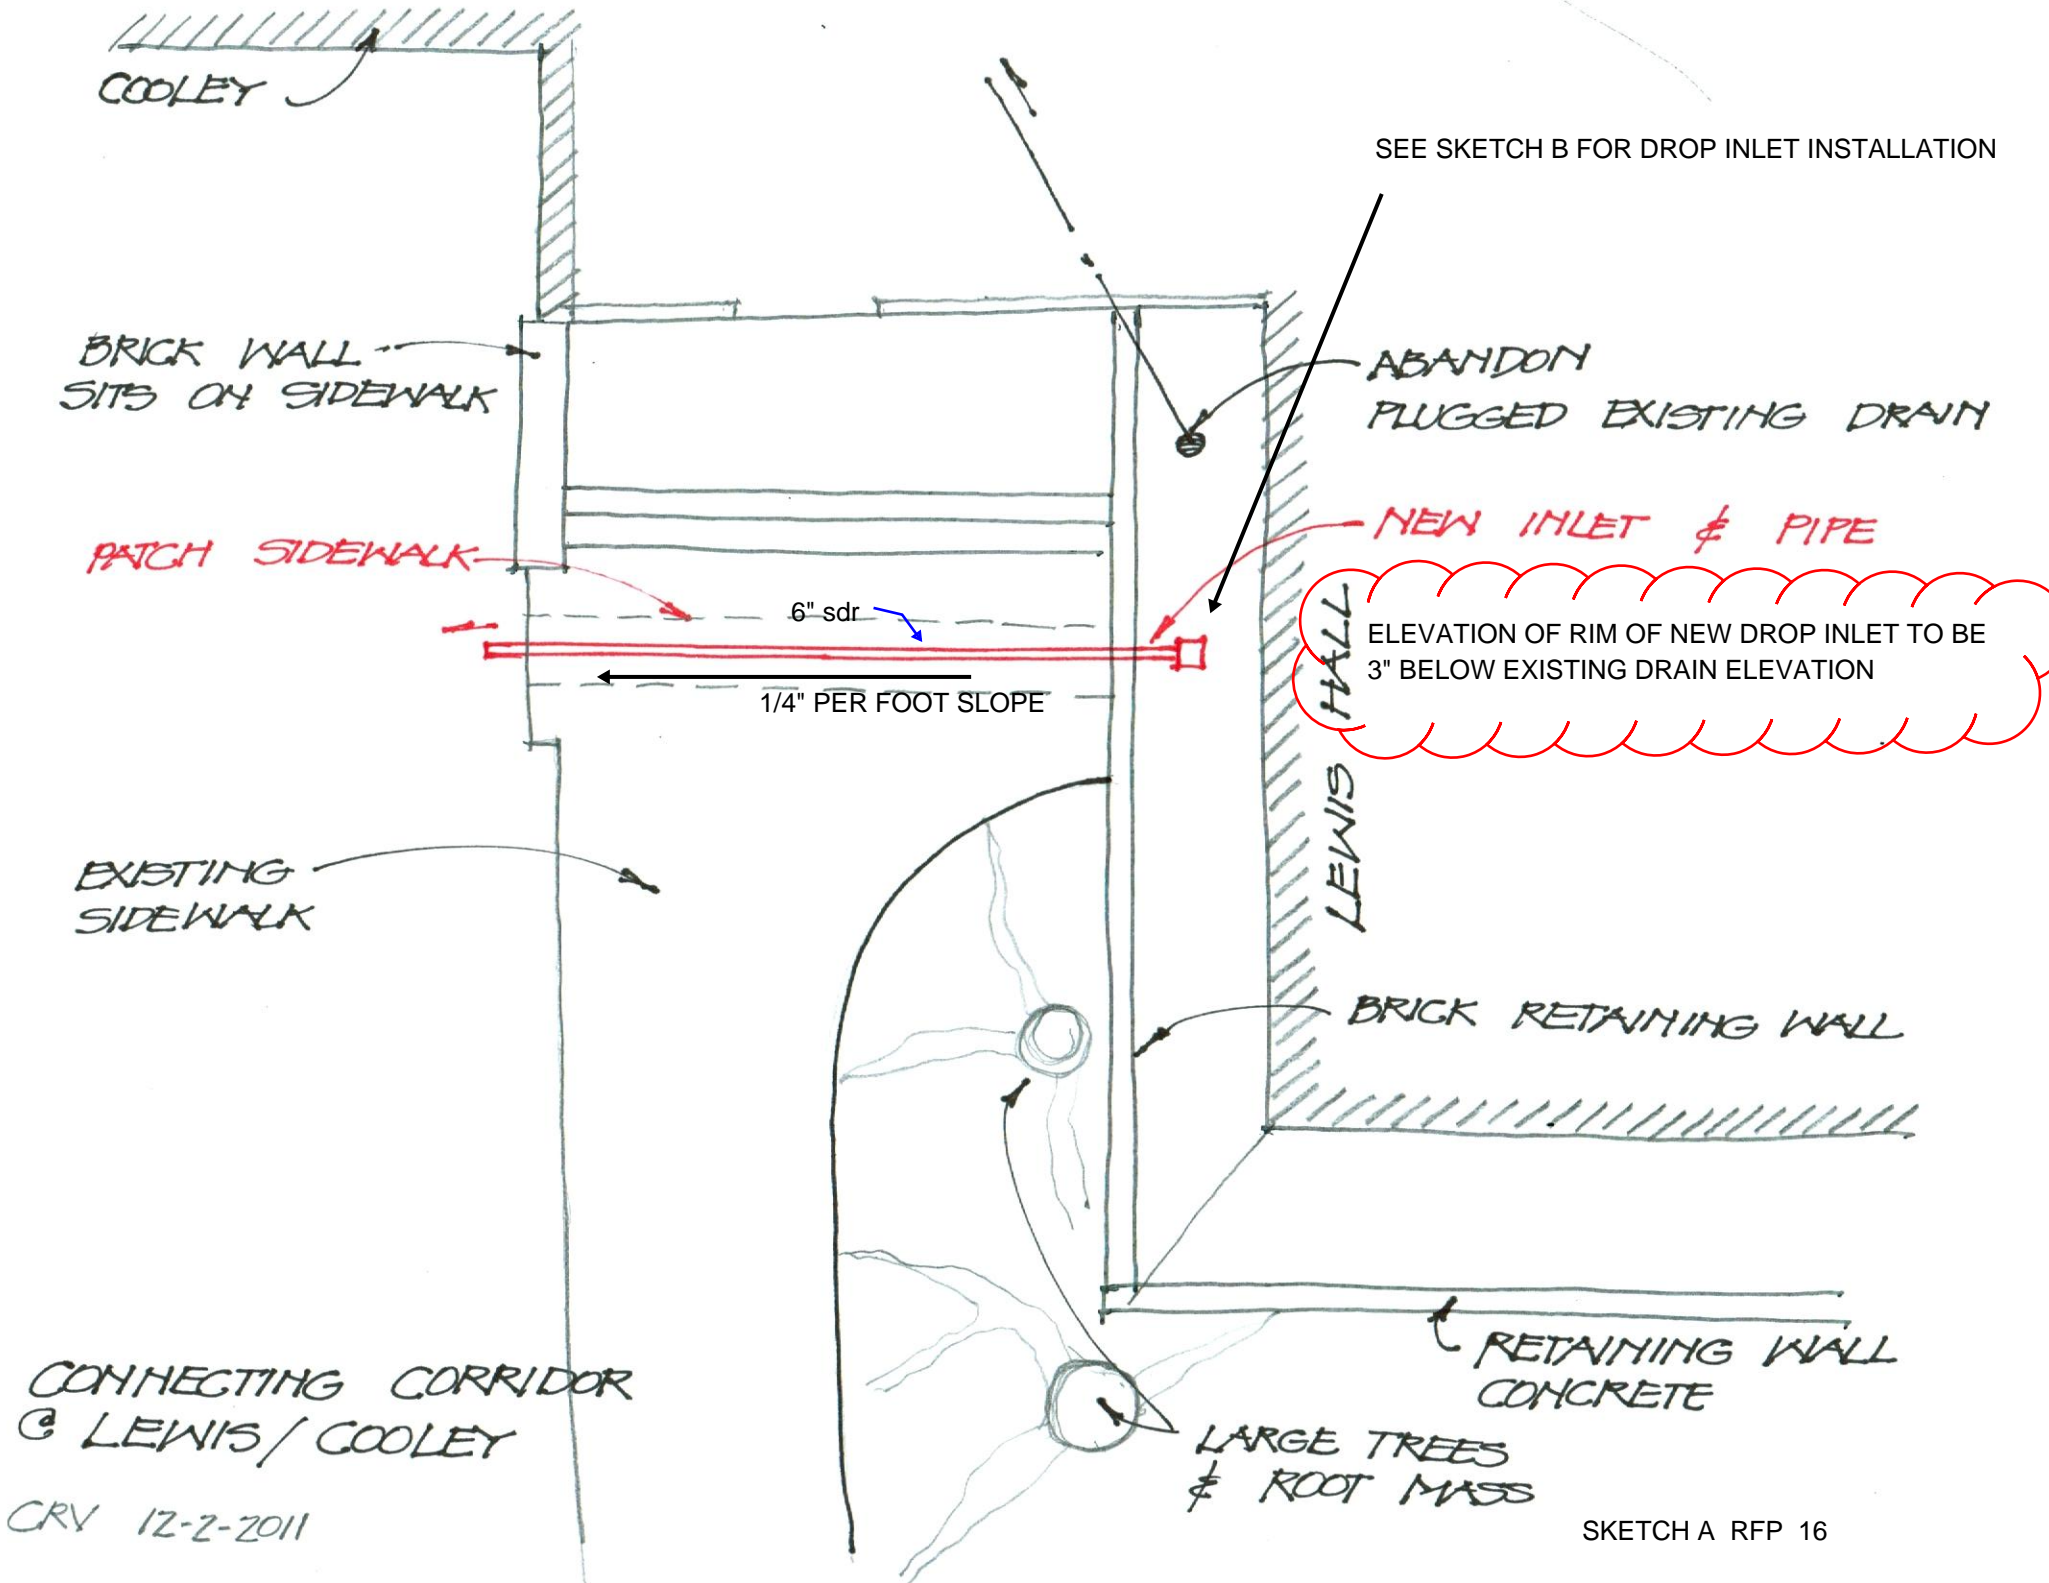

SKETCH A RFP 16

SKETCH B

3'-0"

